

GALLIGVANI

ROUND AND SQUARE BALERS

Round Baler

GA CR32/R | GA CR32L/LR GA CR32 LR SC | 3150/L



Square Baler

3690 | 5690 Gold



GALLIGVANI

DIVISION OF ARGO INDUSTRIAL (PTY) LTD

Specification


the end result is perfection

ROUND BALERS

MODEL	GA CR32/R	GA CR32 L/LR	GA CR32 LR SC	3150/L
Bale size (dia. in m)	1,2 x 1,25	1,2 x 1,25	1,2 x 1,25	1,2 x 1,55
PTO speed (rpm)	540	540	540	540
Hydraulic lines	2SA	2SA	2SA	2
Min PTO power (kW/hp)	37/50	37/50	70/90	65/48
Pick-up width (nom) (m)	1,50	2,00	2,00	1,50/2,00
Tine bars/tine x row (no)	4/20	4/28	4/28	4/28
Slats on tailgate conv. (no)	22	22	22	27
Baler length (m)	3,7	3,7	3,7	4,35
Baler width (m)	2,27	2,48	2,48	2,48
Baler height (m)	2,08	2,08	2,08	2,40
Super Cut with 14 knives	N/A	N/A	STD	N/A
Twin Drive transmission	N/A	N/A	STD	N/A
Short crop deflector	STD	STD	N/A	STD
Net wrapping	OPT	OPT	OPT	OPT

FEATURES:

The **GALSYSTEM**, fixed chamber system developed by **Gallignani** is based on the combination of a front section with steel lobed rollers (providing high density wrapping and a perfect finish to the bale) and a rear section with chains and slats (favoring the bale rotation in all conditions even with the driest crops) Automatic twin twine binder with twine cross-over for tight and solid binding of all crops. Net wrap unit. Standard bale kicker. Automatic drive chain lubrication system at every bale. Twin drive transmission (GA CR32 LR SC only). Automatic tale gate tensioner. Automatic bale counter and bale monitor. A **Super Cut** system (GA CR32 LR SC only) is installed in the baler intake. The system allows grass to be cut in approximately 7,5 cm lengths, turning high quality grass silage into heavy and dense round bales. A higher bale density means less air into the bale and, consequently, less fermentation for better crop preservation.

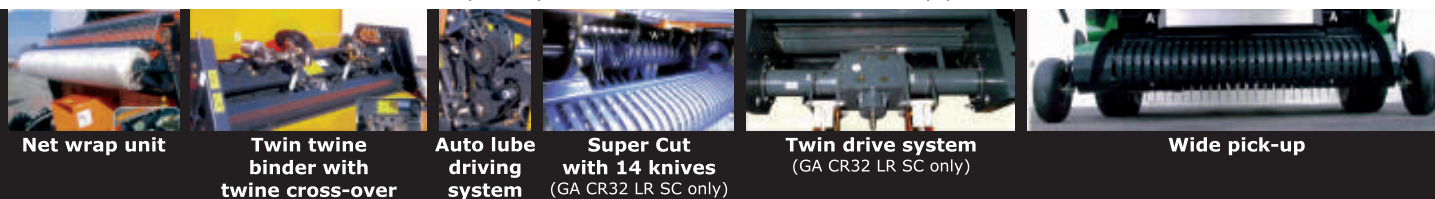


SQUARE BALERS

MODEL	3690	5690 GOLD
Chamber cross section (m)	3,6 x 4,60	3,6 x 4,60
Ram travel/strokes (m/no min)	6,60/100	7,3/104
Min PTO power (kW/hp)	26-29/35-40	34-40/45-55
Bale weight (Hay) (kg)	25-35	25-35
Bale weight (Straw) (kg)	20-25	20-25
Pick-up width (nominal) (m)	1,7	1,7
Weight (kg)	1280	1620
Baler length (m)	4,14	4,76
Baler width (m)	2,45	2,50
Baler height (m)	1,72	1,86

FEATURES:

The automatic chain tensioners ensure reduced wear and increase the life-span of all the transmission chains and minimize maintenance. The **Gallignani** knotter excels in its precision and reliability, and is suitable for synthetic or sisal twine. The wire twister is unbeatable in severe working conditions. The high performance plunger is mounted on sturdy bearings which run along heavy duty guides. The exclusive **Gallignani** pick-up has robust, long lasting tines contributing to the high feeding capacity with any type of crop and swath size. The pick-up has a flared intake guide, spring loaded for automatic repositioning. The feeding fork device is equipped with a solid, automatic release device which regulates the feeding flow. The second fork is protected by a shear bolt. The steel mesh guard over the feeding forks allows the operator to follow the baler's performance at all times.

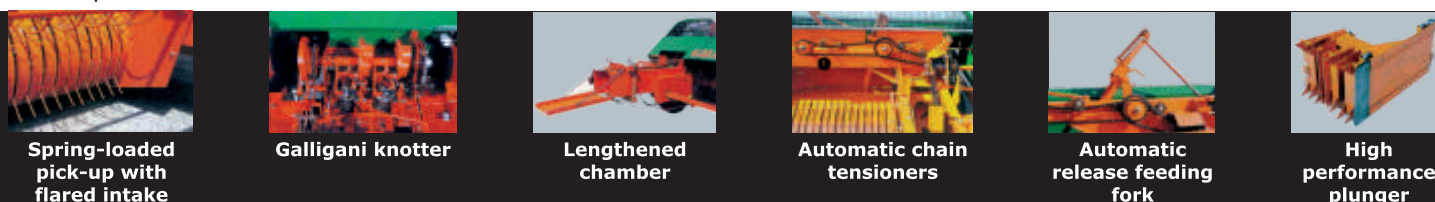

FOR MORE INFORMATION SEE YOUR NEAREST DEALER OR CONTACT: **GALLIGNANI**

HEAD OFFICE: 011 914 1700 | WESTERN CAPE: 082 809 9460 | KWAZULU-NATAL: 082 907 4336 DIVISION OF ARGOSIA INDUSTRIAL (PTY) LTD

Argo Industrial (Pty) Ltd | 1 West Street, Boksburg East | P.O. Box 161, Boksburg East, 1478 | Tel: 011 914 1700 | Fax: 011 914 3993 | E-Mail: landini@argosa.co.za | Web: www.argosa.co.za